

# 联通云平台(Telit) 使用说明

联通云平台(Telit)是针对Telit开发的一个FreeIOE 通用应用，您可以在任何内置了FreeIOE的网关中安装联通云平台(Telit)应用，通过此应用，可将网关中设备数据通过Telit平台的MQTT协议推送联通云平台(Telit)


## 准备工作

登录telit平台创建物模型和应用 联通telit平台登录地址：<https://device1-portal.10646.cn> 联通telit平台mqtt连接信息 `mqtt:device1-api.10646.cn:1883 mqtt+ssl:device1-api.10646.cn:8883`

## 在Telit平台创建物模型

- 创建一个网关的设备模型，因为网关也是一个设备，举例说明：这里使用网关型号创建一个物模型。


新建物模型界面如下：

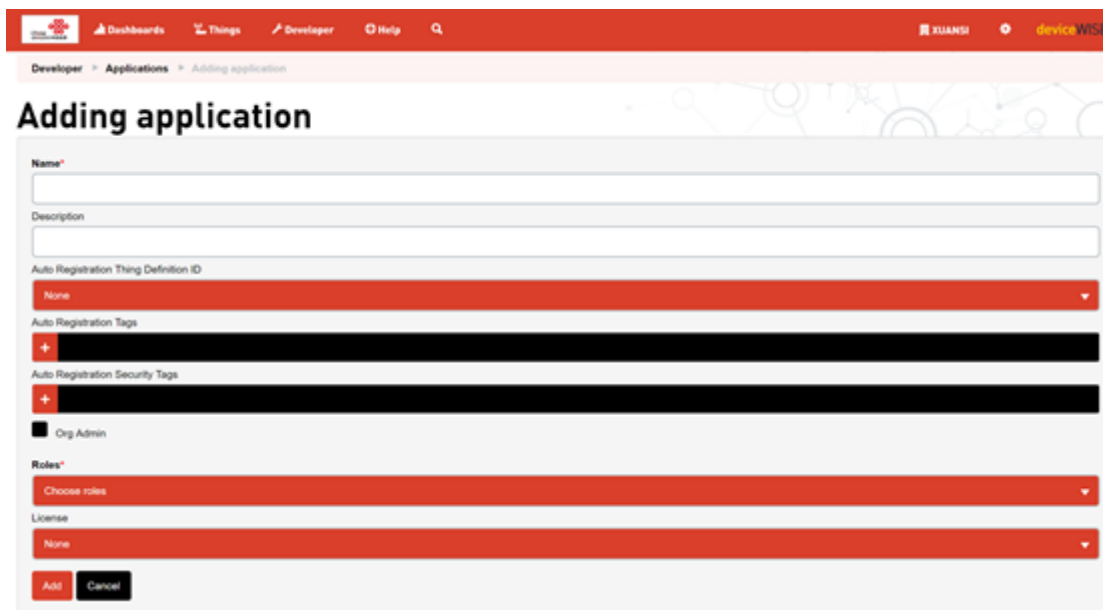

The screenshot shows a web interface for adding a new application. The title is "Adding application". The form contains the following fields and options:


- Name\***: A text input field.
- Description**: A text input field.
- Auto Registration Thing Definition ID**: A dropdown menu with "None" selected.
- Auto Registration Tags**: A list with a "+" icon and a redacted tag.
- Auto Registration Security Tags**: A list with a "+" icon and a redacted tag.
- Org Admin**: A checkbox that is checked.
- Roles\***: A dropdown menu with "Choose roles" selected.
- License**: A dropdown menu with "None" selected.
- Buttons**: "Add" and "Cancel" buttons at the bottom left.

输入KEY和NAME可以相同，也可以不同。记得勾选Auto def attributes和Auto def propertie不勾选，就得自己手动创建设备中的所有标签变量。

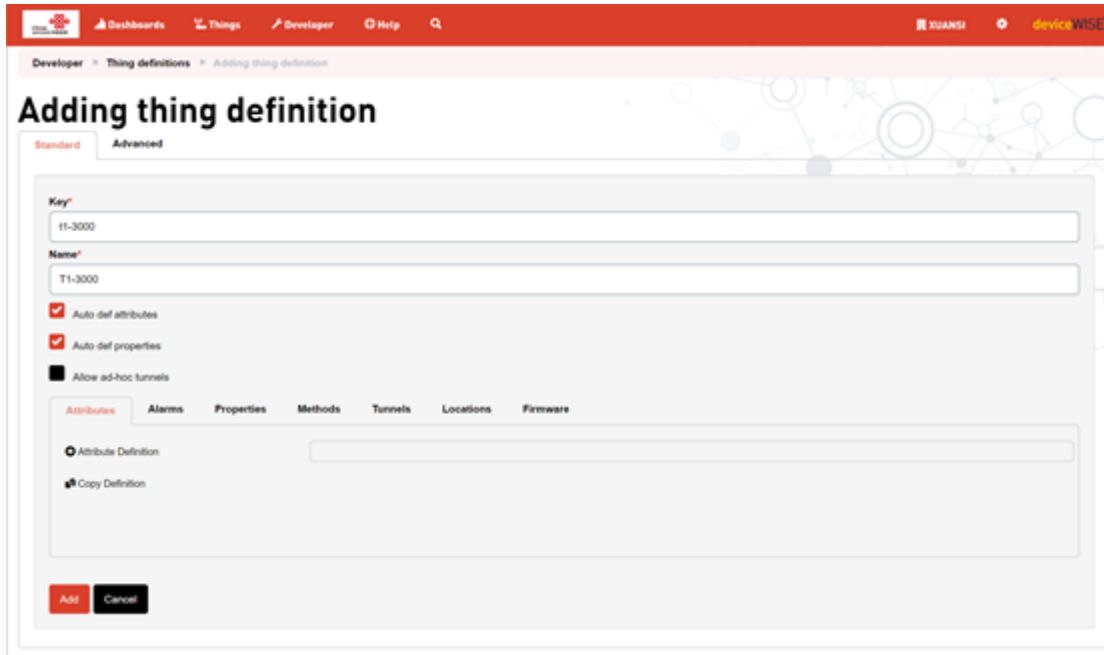


完成后可以查看物模型的信息。

### Editing T1-3000

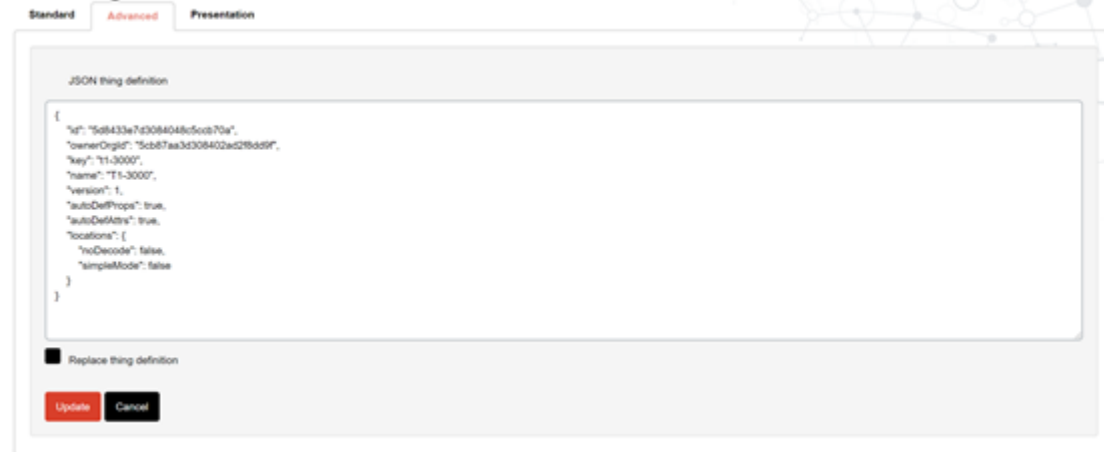

Thing definition added. Update presentation as needed.

### Editing T1-3000

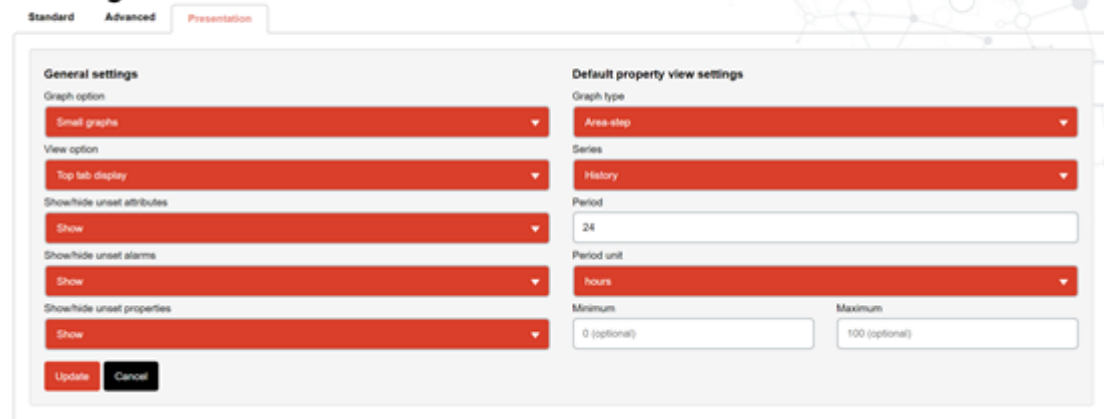


- 将网关采集的设备分别创建物模型，这里创建了一个t1-3000-netinfo[]使用时需要根据实际情况创建。




### 在Telit平台创建应用

给新的应用定义名称和描述

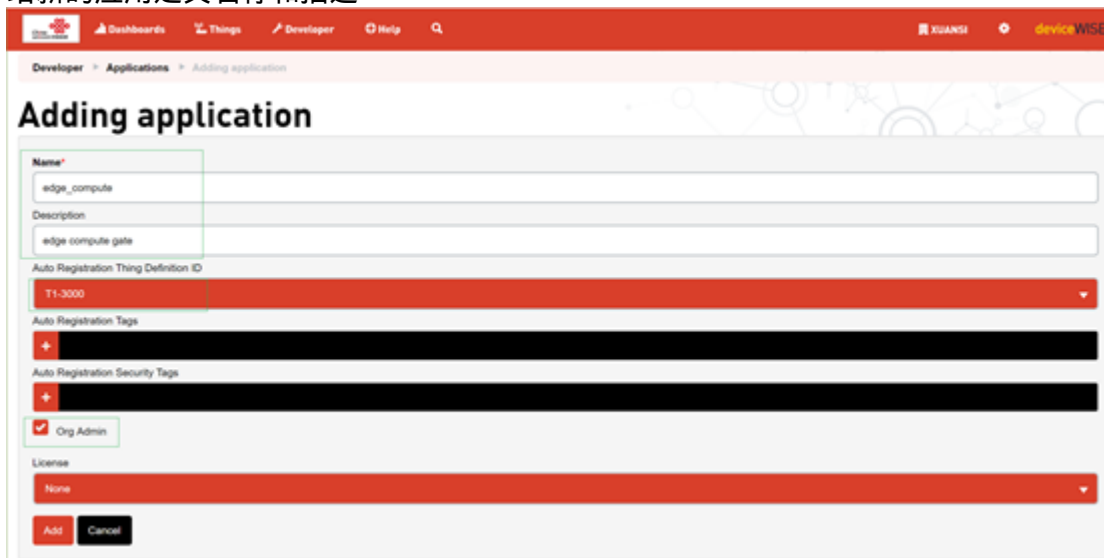

到应用ID[]这个很重要，需要记录下来[]Token也需要记录下来。

定义完成后，可看

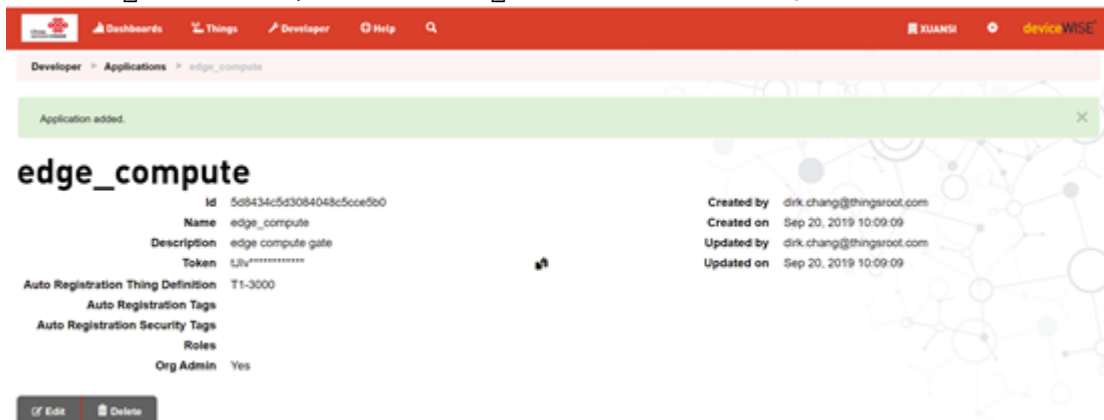


击Token后面的复制图标即可。

获取应用令牌，点

## 应用配置

默认一定会将网关中的标签变量送到telit平台，因此这里需要输入在telit平台上定义的网关物模型。网关采集的设备和telit平台的物模型对应关系在下方的表中。需要先在telit平台上定义需要的物模型，然后再配置网关的telit应用，如网关采集的多个设备是同一类设备，那么可对应到同一个物模型

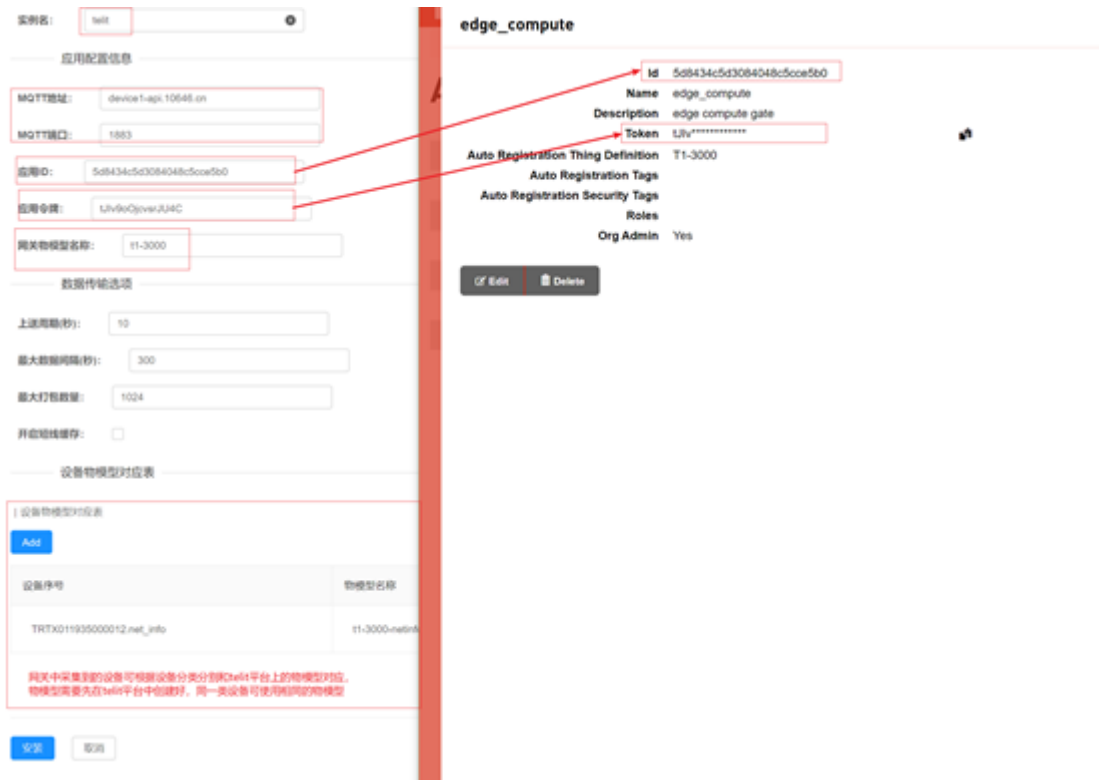

## 在Telit平台查看新增设备

回到Telit平台，在Things下看一看是否有新的设备出现。

China UNICOM
Dashboards
Things
Developer
Help
Q

# Things

defkey   disconnected   **connected**

Dashboard
Table
Map

### Connected things



### Recently added things

Key	Name	Added on
trtx011935000012__net_info	net_info	21 seconds ago
trtx011935000012	auto:trtx011935000012	23 seconds ago
2-30002-001843-00059__gl	GL	15 hours, 39 minutes ago
2-30002-001843-00059	2-30002-001843-00059	15 hours, 41 minutes ago
trtx011902000001__gl	GL	15 hours, 43 minutes ago
trtx011902000001	TRTX011902000001	15 hours, 46 minutes ago
ididididid__gl	BMS	16 hours, 20 minutes ago
ididididid	IDIDIDIDID	17 hours, 7 minutes ago
slsn23000200184300059dc1	201909	2 weeks, 2 days ago
slsn23000200190700255q5a...	abc11	on Jun 9, 2019

点击眼睛图标查看设备数据。

### Recently added things

Key	Name	Added on
trtx011935000012__net_info	net_info	21 seconds ago
trtx011935000012	auto:trtx011935000012	23 seconds ago
-00059__gl	GL	15 hours, 39 minutes ago
-00059	2-30002-001843-00059	15 hours, 41 minutes ago
trtx011902000001__gl	GL	15 hours, 43 minutes ago

View  
auto:trtx011935000012

可以看到网关自身的数据传送到telit平台



From:  
<https://wiki.freeioe.org/> - FreeIOE 知识库

Permanent link:  
<https://wiki.freeioe.org/apps/app00000119?rev=1571132599>

Last update: **2022/07/12 11:29**

