

联通云平台(Telit) 使用说明

联通云平台(Telit)是针对Telit开发的一个FreeIOE 通用应用，您可以在任何内置了FreeIOE的网关中安装联通云平台(Telit)应用，通过此应用，可将网关中设备数据通过Telit平台的MQTT协议推送联通云平台(Telit)


准备工作

登录telit平台创建物模型和应用 联通telit平台登录地址：<https://device1-portal.10646.cn> 联通telit平台mqtt连接信息 `mqtt:device1-api.10646.cn:1883` `mqtt+ssl:device1-api.10646.cn:8883`

在Telit平台创建物模型


- 创建一个网关的设备模型，因为网关也是一个设备，举例说明：这里使用网关型号创建一个物模型。

新建物模型界面如下：

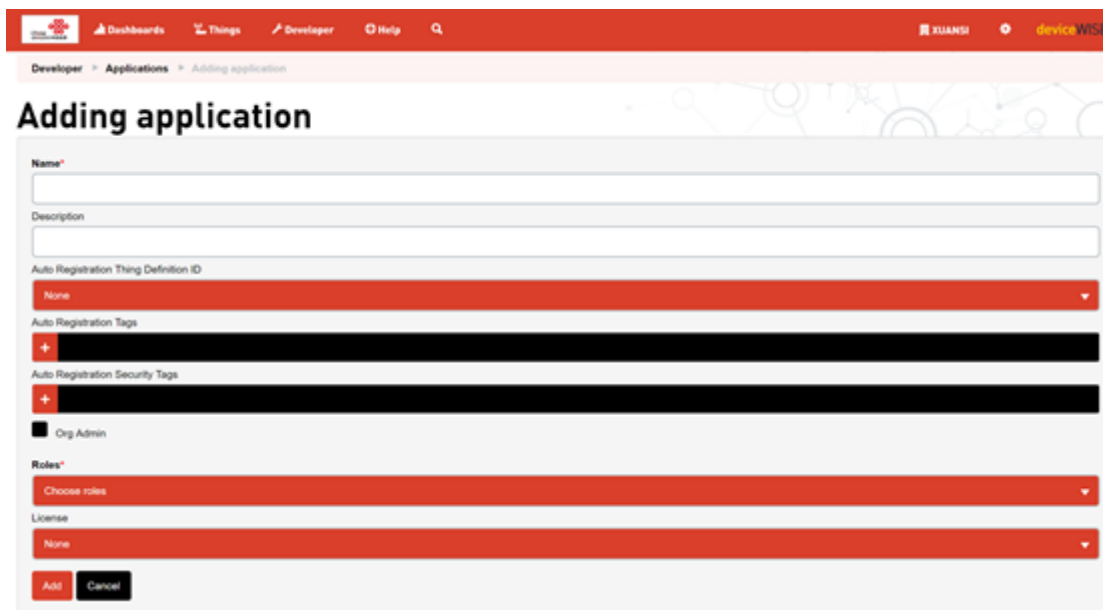


The screenshot shows the 'Adding application' interface. It features a red header with navigation links like 'Dashboards', 'Things', 'Developer', 'Help', and 'deviceWISE'. The main content area has a title 'Adding application' and several input fields: 'Name', 'Description', and 'Auto Registration Thing Definition ID' (set to 'None'). Below these are sections for 'Auto Registration Tags' and 'Auto Registration Security Tags', each with a plus sign and a red bar. There is a checkbox for 'Org Admin' which is checked. The 'Roles' section has a dropdown set to 'Choose roles', and the 'License' section has a dropdown set to 'None'. At the bottom, there are 'Add' and 'Cancel' buttons.


输入KEY和NAME可以相同，也可以不同。记得勾选Auto def attributes和Auto def propertie不勾选，就得自己手动创建设备中的所有标签变量。

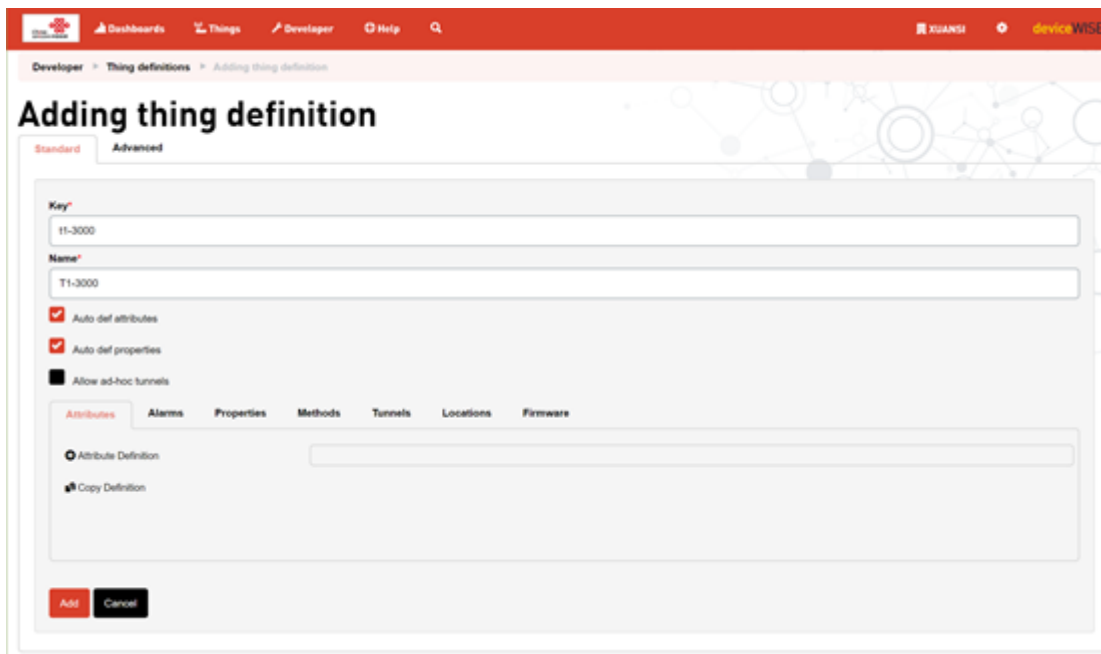

完成后可以查看物模型的信息。

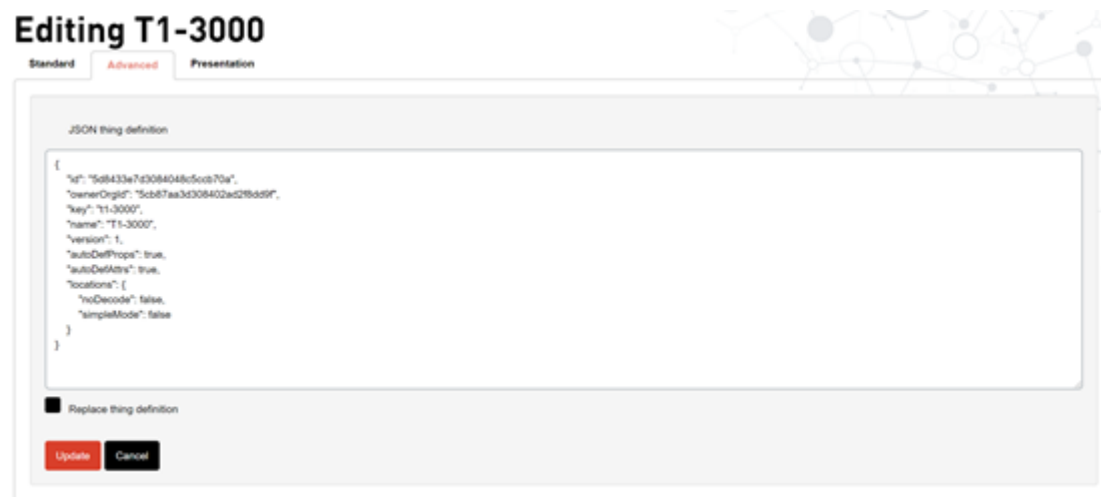

Thing definition added. Update presentation as needed.

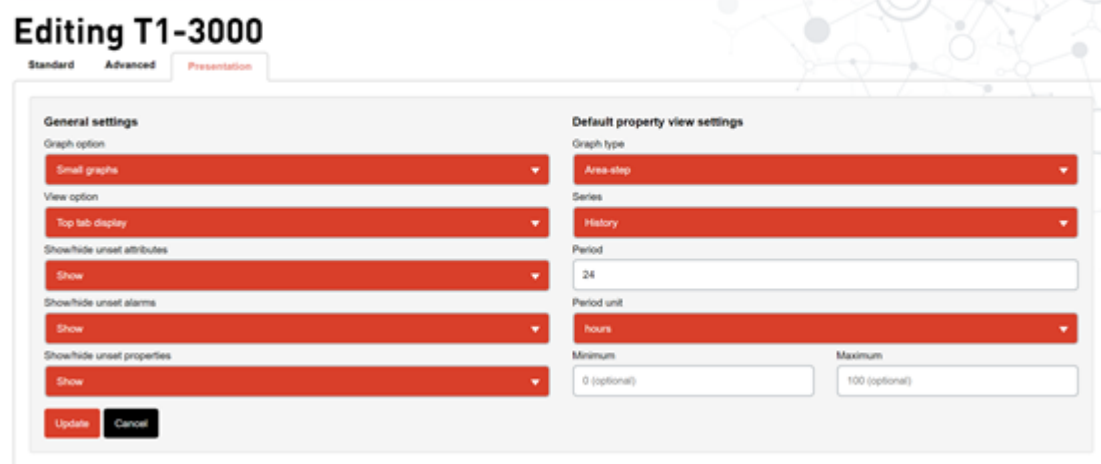


- 将网关采集的设备分别创建物模型，这里创建了一个t1-3000-netinfo[]使用时需要根据实际情况创建。




在Telit平台创建应用

给新的应用定义名称和描述

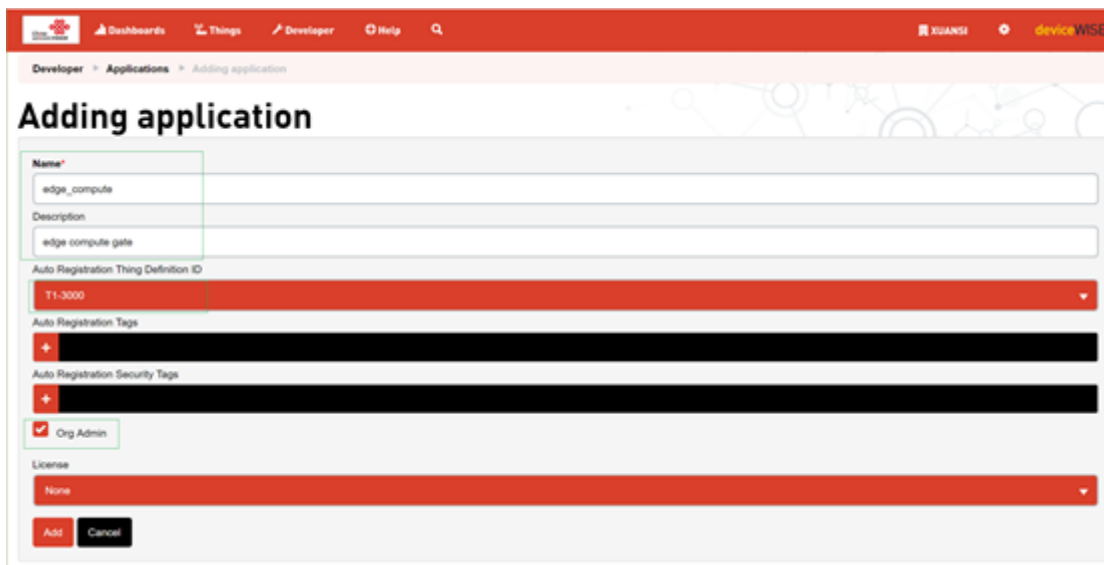


定义完成后，可看到应用ID[]这个很重要，需要记录下来[]Token也需要记录下来。

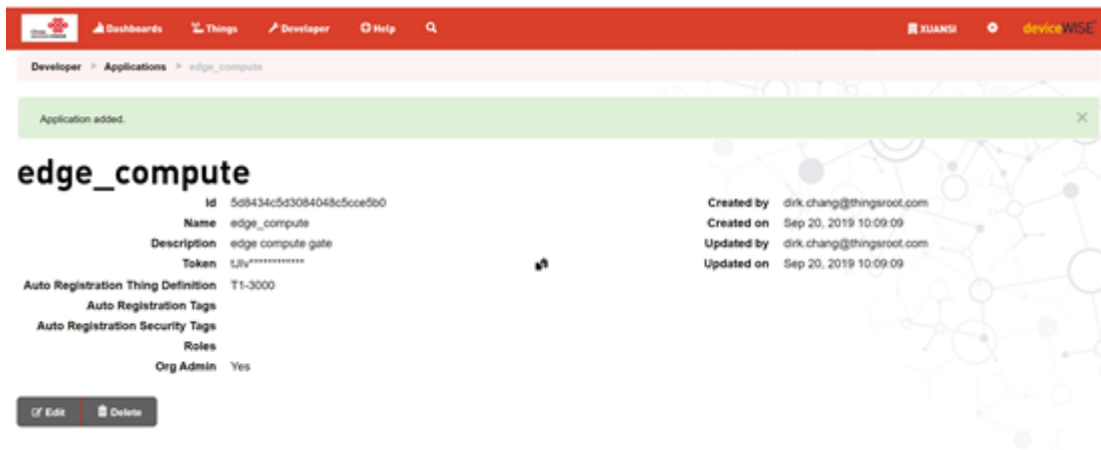

获取应用令牌，点击Token后面的复制图标即可。

应用配置

默认一定会将网关中的标签变量送到telit平台，因此这里需要输入在telit平台上定义的网关物模型。网关采集的设备和telit平台的物模型对应关系在下方的表中。需要先在telit平台上定义需要的物模型，然后再配置网关的telit应用，如网关采集的多个设备是同一类设备，那么可对应到同一个物模型

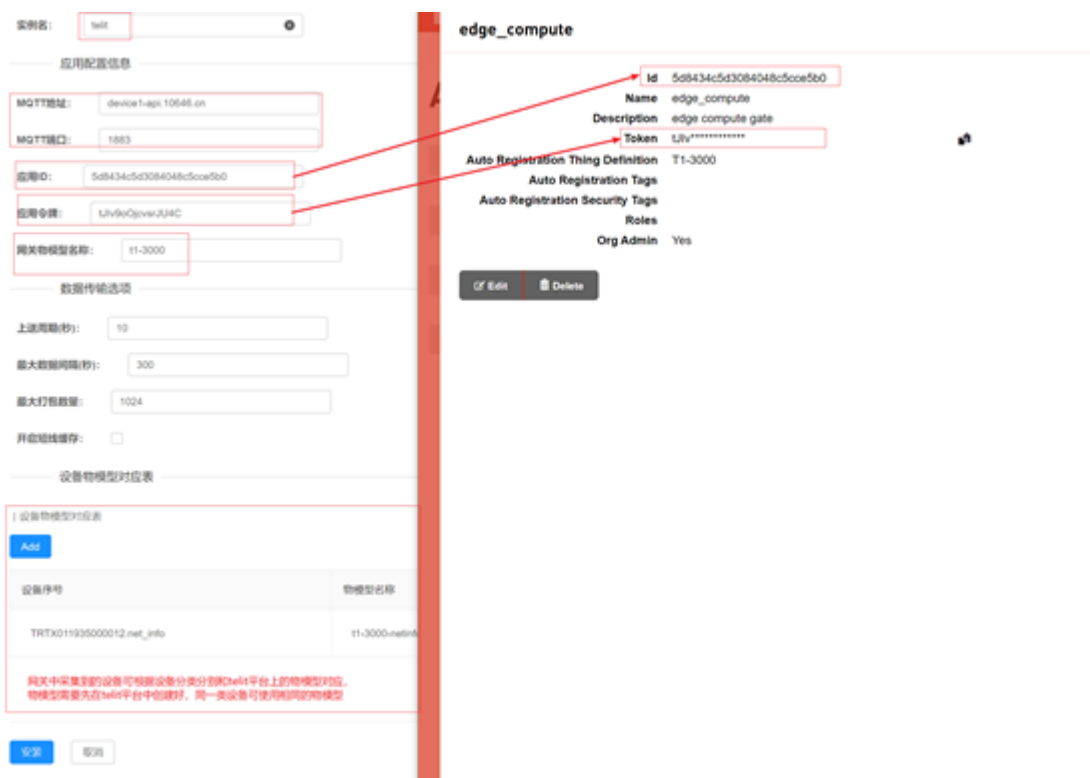

在Telit平台查看新增设备

回到Telit平台，在Things下看一看是否有新的设备出现。

The screenshot shows the 'Things' dashboard interface. At the top, there is a navigation bar with 'China Unicom' logo, 'Dashboards', 'Things', 'Developer', 'Help', and a search icon. Below the navigation bar, the title 'Things' is displayed, followed by a search box containing 'Search things...'. There are three tabs: 'defkey', 'disconnected', and 'connected', with 'connected' being the active tab. Below the tabs, there are three view options: 'Dashboard', 'Table', and 'Map', with 'Dashboard' selected. The main content area is titled 'Connected things' and features a pie chart with a large red slice and a smaller green slice. Below the pie chart is a section titled 'Recently added things' containing a table with three columns: 'Key', 'Name', and 'Added on'. The table lists several entries, with the first two rows highlighted by a red border.

Key	Name	Added on
👁 trtx011935000012__net_info	net_info	21 seconds ago
👁 trtx011935000012	auto:trtx011935000012	23 seconds ago
👁 2-30002-001843-00059__gl	GL	15 hours, 39 minutes ago
👁 2-30002-001843-00059	2-30002-001843-00059	15 hours, 41 minutes ago
👁 trtx011902000001__gl	GL	15 hours, 43 minutes ago
👁 trtx011902000001	TRTX011902000001	15 hours, 46 minutes ago
👁 ididididid__gl	BMS	16 hours, 20 minutes ago
👁 ididididid	IDIDIDIDID	17 hours, 7 minutes ago
👁 slsn23000200184300059dc1	201909	2 weeks, 2 days ago
👁 slsn23000200190700255q5a...	abc11	on Jun 9, 2019

点击眼睛图标查看设备数据。

This is a close-up view of the 'Recently added things' table. A red tooltip with the text 'View auto:trtx011935000012' is positioned over the second row of the table. The table structure is identical to the one in the previous screenshot.

Key	Name	Added on
👁 trtx011935000012__net_info	net_info	21 seconds ago
👁 trtx011935000012	auto:trtx011935000012	23 seconds ago
👁 2-30002-001843-00059__gl	GL	15 hours, 39 minutes ago
👁 2-30002-001843-00059	2-30002-001843-00059	15 hours, 41 minutes ago
👁 trtx011902000001__gl	GL	15 hours, 43 minutes ago

可以看到网关自身的数据传送到telit平台



From:
<https://wiki.freeioe.org/> - FreeIOE 知识库

Permanent link:
<https://wiki.freeioe.org/apps/app00000119?rev=1571132649>

Last update: **2022/07/12 11:29**

