

联通云平台(Telit) 使用说明

联通云平台(Telit)是针对Telit开发的一个FreeIOE 通用应用，您可以在任何内置了FreeIOE的网关中安装联通云平台(Telit)应用，通过此应用，可将网关中设备数据通过Telit平台的MQTT协议推送联通云平台(Telit)

准备工作

登录telit平台创建物模型和应用


联通telit平台登录地址：<https://device1-portal.10646.cn>

联通telit平台mqtt连接信息 `mqtt:device1-api.10646.cn:1883 mqtt+ssl:device1-api.10646.cn:8883`

在Telit平台创建物模型


- 创建一个网关的设备模型，因为网关也是一个设备，举例说明：这里使用网关型号创建一个物模型。

新建物模型界面如下：

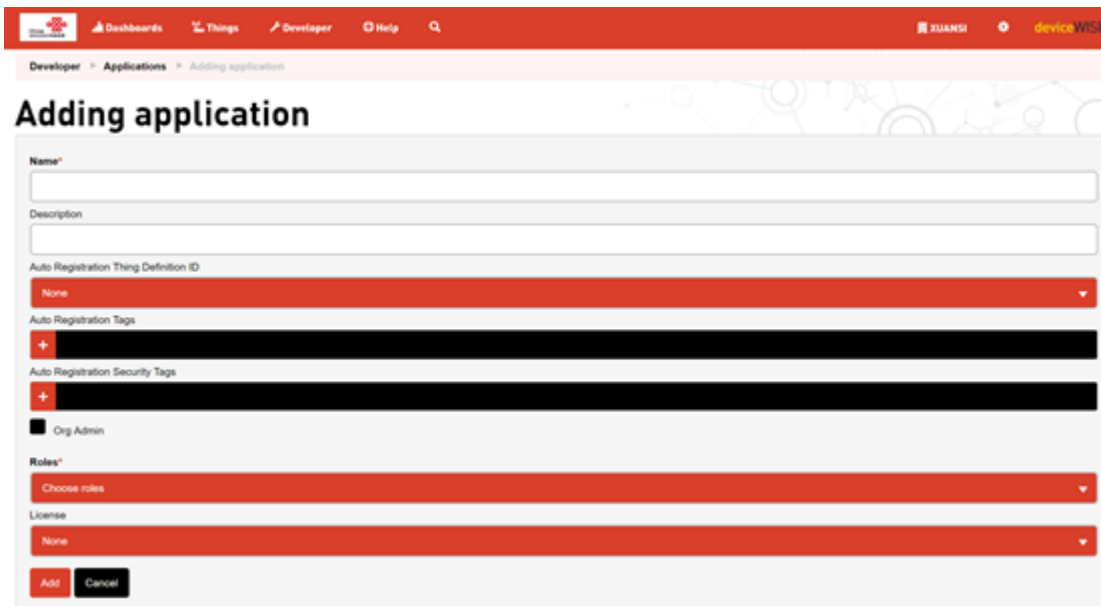


The screenshot shows the 'Adding application' form in the Telit platform. The form has a red header with navigation links: Dashboards, Things, Developer, Help, and a search icon. The breadcrumb is 'Developer > Applications > Adding application'. The form fields are: Name* (text input), Description (text input), Auto Registration Thing Definition ID (dropdown menu with 'None' selected), Auto Registration Tags (list with a '+' button), Auto Registration Security Tags (list with a '+' button), Org Admin (checkbox, checked), Roles* (dropdown menu with 'Choose roles' selected), License (dropdown menu with 'None' selected), and Add/Cancel buttons at the bottom.

输入KEY和NAME可以相同，也可以不同。记得勾选Auto def attributes和Auto def propertie不勾选，就得自己手动创建设备中的所有标签变量。

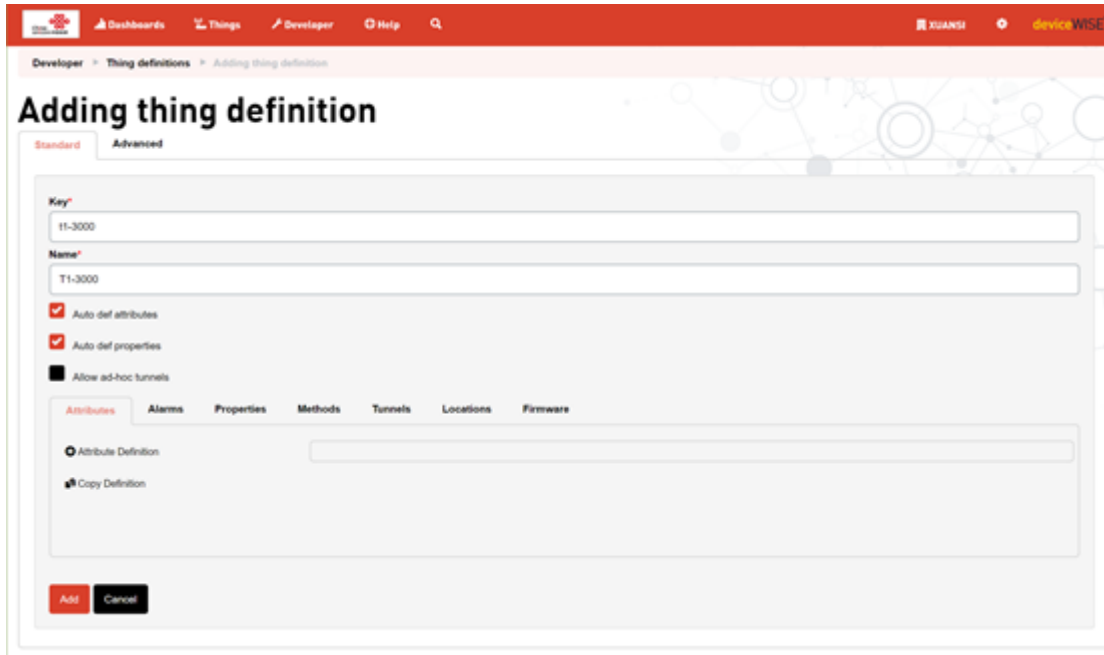


完成后可以查看物模型的信息。

Editing T1-3000

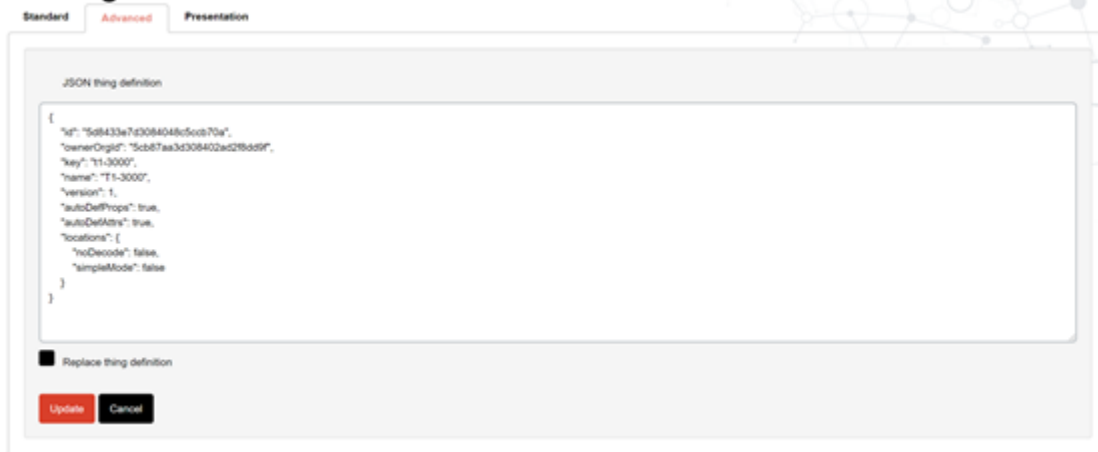


Thing definition added. Update presentation as needed.

Editing T1-3000

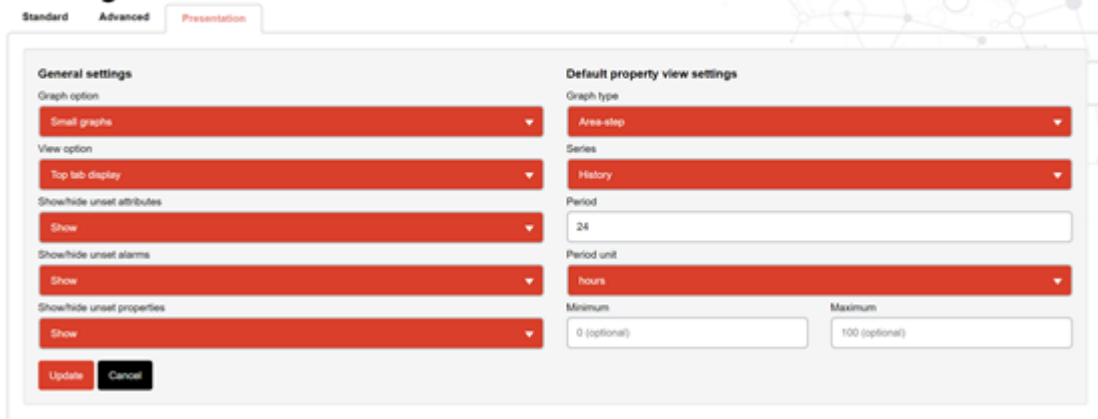


- 将网关采集的设备分别创建物模型，这里创建了一个t1-3000-netinfo[]使用时需要根据实际情况创建。

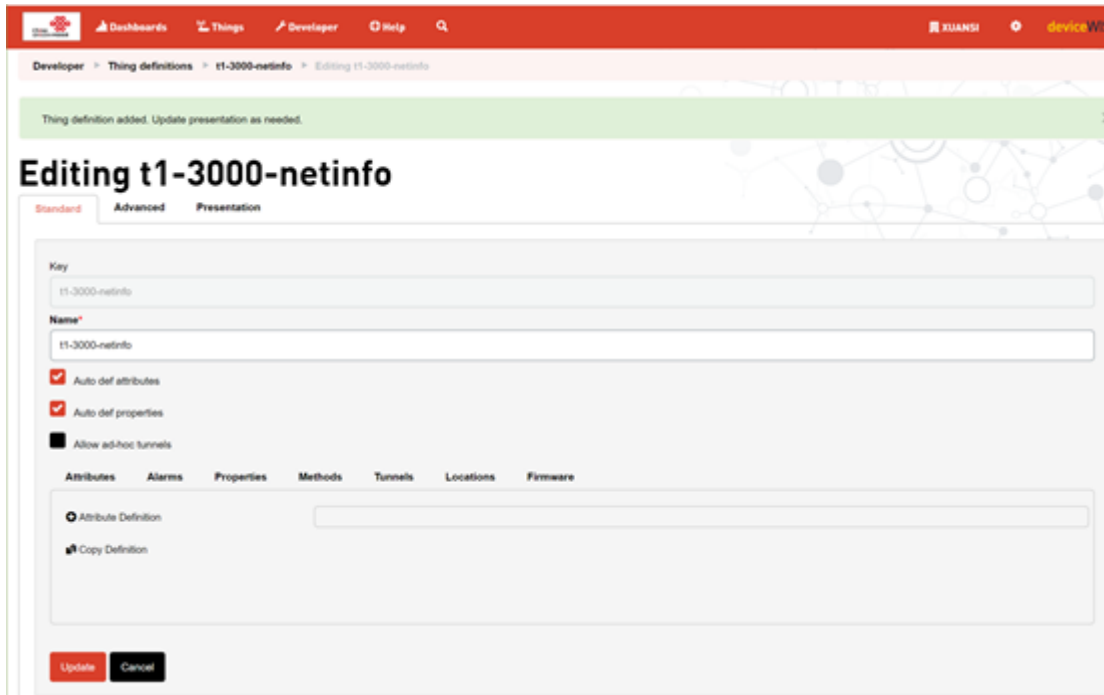


在Telit平台创建应用

给新的应用定义名称和描述

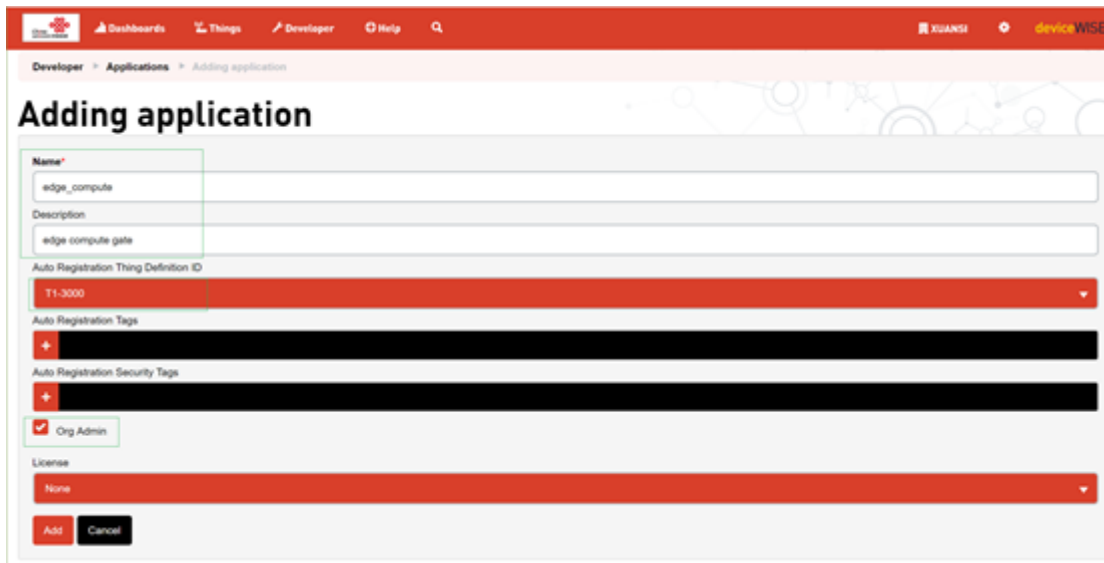


定义完成后，可看到应用ID[]这个很重要，需要记录下来[]Token也需要记录下来。

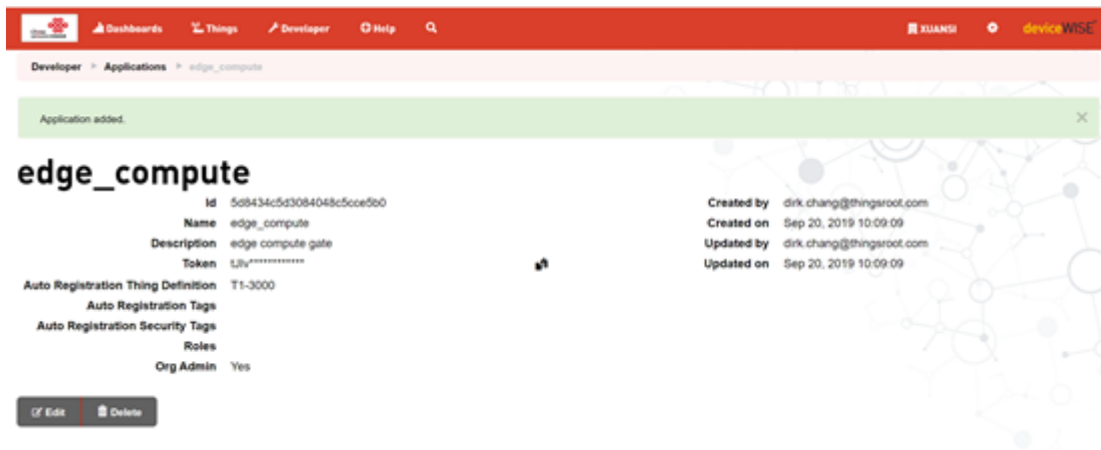

获取应用令牌，点击Token后面的复制图标即可。

应用配置

默认一定会将网关中的标签变量送到telit平台，因此这里需要输入在telit平台上定义的网关物模型。网关采集的设备和telit平台的物模型对应关系在下方的表中。需要先在telit平台上定义需要的物模型，然后再配置网关的telit应用，如网关采集的多个设备是同一类设备，那么可对应到同一个物模型

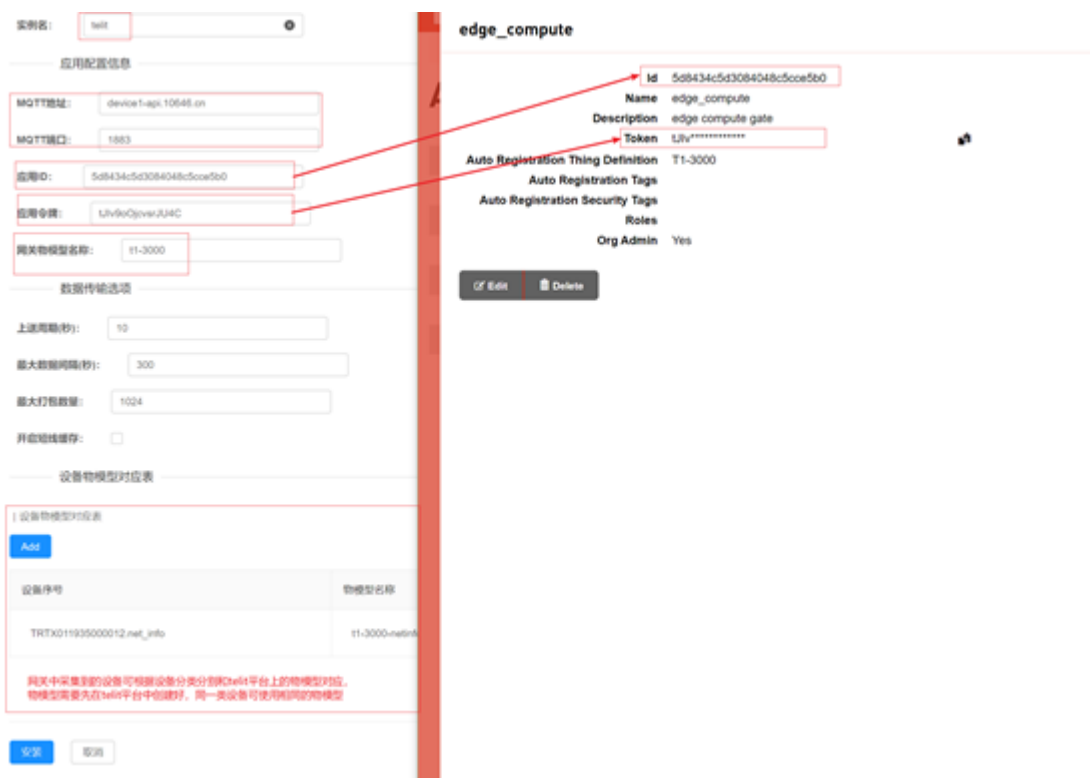

在Telit平台查看新增设备

回到Telit平台，在Things下看一看是否有新的设备出现。

China Unicom

Dashboards Things Developer Help

Things

Search things...

defkey disconnected **connected**

Dashboard Table Map

Connected things

Recently added things

Key	Name	Added on
trtx011935000012__net_info	net_info	21 seconds ago
trtx011935000012	auto:trtx011935000012	23 seconds ago
2-30002-001843-00059__gl	GL	15 hours, 39 minutes ago
2-30002-001843-00059	2-30002-001843-00059	15 hours, 41 minutes ago
trtx011902000001__gl	GL	15 hours, 43 minutes ago
trtx011902000001	TRTX011902000001	15 hours, 46 minutes ago
ididididid__gl	BMS	16 hours, 20 minutes ago
ididididid	IDIDIDIDID	17 hours, 7 minutes ago
slsn23000200184300059dc1	201909	2 weeks, 2 days ago
slsn23000200190700255q5a...	abc11	on Jun 9, 2019


点击眼睛图标查看设备数据。

Recently added things

Key	Name	Added on
trtx011935000012__net_info	net_info	21 seconds ago
trtx011935000012	auto:trtx011935000012	23 seconds ago
2-30002-001843-00059__gl	GL	15 hours, 39 minutes ago
2-30002-001843-00059	2-30002-001843-00059	15 hours, 41 minutes ago
trtx011902000001__gl	GL	15 hours, 43 minutes ago

View auto:trtx011935000012

可以看到网关自身的数据传送到telit平台

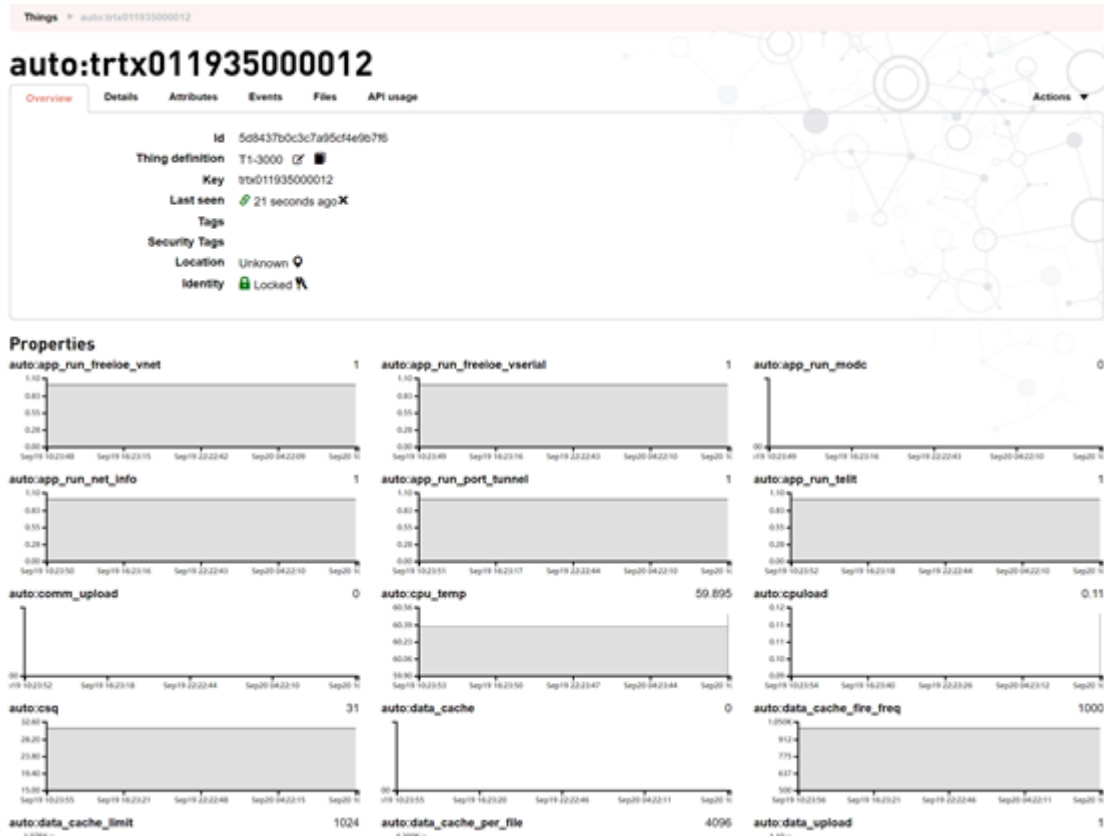

From: <https://wiki.freeioe.org/> - FreeIOE 知识库

Permanent link: <https://wiki.freeioe.org/apps/app00000119?rev=1571132856>

Last update: 2022/07/12 11:29

